
O5S700

Through-beam laser sensor transmitter

O5SLOOKG/US100

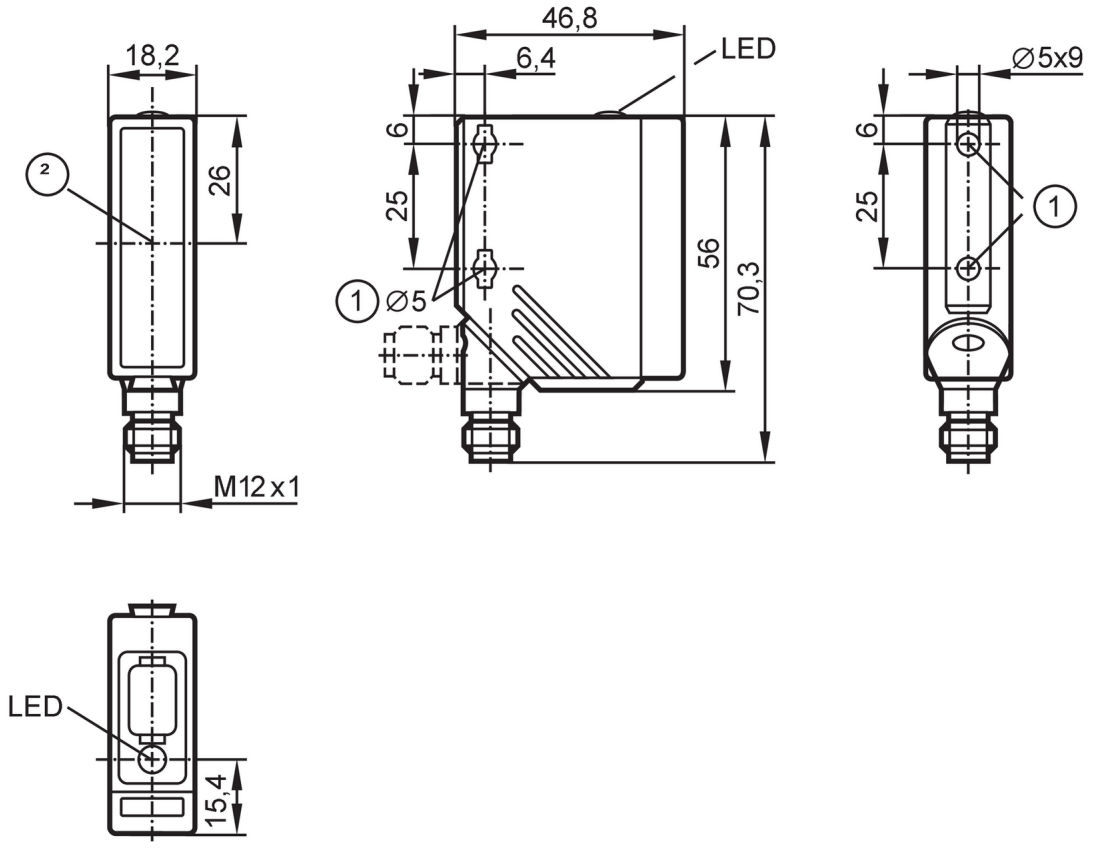

1 When a M5 mounting screw is used, the max. tightening torque is 2 Nm.
2 light emission

Product characteristics		
Type of light		red light
Laser protection class		1
Housing		rectangular
Application		
Function principle		Through-beam sensor
Application		Industrial applications / factory automation
Electrical data		
Operating voltage	[V]	10...36 DC
Current consumption	[mA]	13
Protection class		II
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	655
Detection zone		
Transmitter / receiver		transmitter
Range	[m]	< 60
Range adjustable		no
Max. light spot diameter	[mm]	150


O5S700

Through-beam laser sensor transmitter

O5SLOOKG/US100

Light spot dimensions refer to		at maximum range	
Operating conditions			
Ambient temperature	[°C]	-10...60	
Protection		IP 67	
Tests / approvals			
EMC		EN 60947-5-2	
Laser protection class		1	
Notes on laser protection		Caution:	laser light
		laser class:	1
			EN / IEC60825-1:2007
			EN / IEC60825-1:2014
			Complies with 21 CFR 1040.10 except for conformance with IEC 60825-1 Ed. 3, as described in Laser Notice No. 56, dated May 8, 2019.
MTTF	[years]	1038	
Mechanical data			
Weight	[g]	67	
Housing		rectangular	
Dimensions	[mm]	56 x 18.2 x 46.8	
Materials		housing: PA; bezel: stainless steel; operator interface: TPU	
Lens material		front pane:PMMA	
Lens alignment		side lens	
Displays / operating elements			
Display		operation	1 x LED, green
Remarks			
Remarks		operating voltage "supply class 2" according to cULus	
Pack quantity		1 pcs.	
Electrical connection			

Connector: 1 x M12; coding: A; Contacts: 4



O5S700

Through-beam laser sensor transmitter

O5SLOOKG/US100

Connection

